

Packaged
AIR CONDITIO[°] NERS



The new degree of comfort.™

R410A

R-410A HFC refrigerant



Scroll compressors with internal line break overload and high-pressure protection



High and Low Pressure cutout switch



Solid Core liquid line filter drier on each circuit



Belt-drive blower with adjustable pitch motor sheave



Microchannel condenser coil




G90 galvanized sheet metal cabinet, painted finish meets ASTM-B117 1008 hr salt spray test



Outdoor coil louver/hail guards, phase monitor and freeze stat are optional

**SLKL-B
Series**

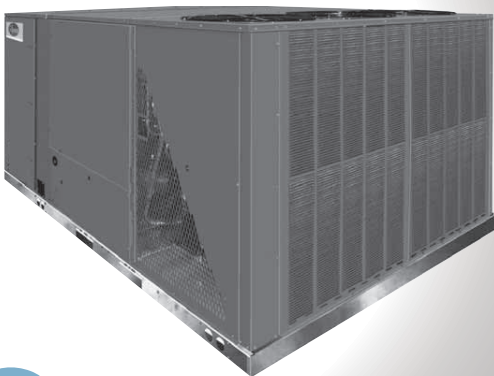

R-410A
60Hz

TECHNICAL DATA

SLKL-B		SLKL-B090CL	SLKL-B090CM	SLKL-B090CN	SLKL-B090VL	SLKL-B090VM	SLKL-B090VN	SLKL-B120CL
Net Cooling Capacity @AHRI	Btu/hr	84000	84000	84000	84000	84000	84000	116000
EER @AHRI	Btu/W-hr	11.2	11.2	11.2	11.2	11.2	11.2	11.2
Rated Air Flow	CFM	2925	2925	2925	2925	2925	2925	3600
Unit Sizes	L (mm)	2380	2380	2380	2380	2380	2380	2380
	W (mm)	1492	1492	1492	1492	1492	1492	1492
	H (mm)	1021	1021	1021	1021	1021	1021	1173
Weight	kg	400	400	404	400	400	400	446
Refrigerant		R410A						

SLKL-B		SLKL-B120CM	SLKL-B120VL	SLKL-B120VM	SLKL-B151CL	SLKL-B151CM	SLKL-B151VL	SLKL-B151VM
Net Cooling Capacity @AHRI	Btu/hr	116000	116000	116000	140000	140000	140000	140000
EER @AHRI	Btu/W-hr	11.2	11.2	11.2	11.0	11	11	11
Rated Air Flow	CFM	3600	3600	3600	4225	4225	4225	4225
Unit Sizes	L (mm)	2380	2380	2380	2380	2380	2380	2380
	W (mm)	1492	1492	1492	1492	1492	1492	1492
	H (mm)	1173	1173	1173	1118	1118	1118	1118
Weight	kg	450	446	446	558	562	558	558
Refrigerant		R410A						

SLKL-B		SLKL-B180CL	SLKL-B180CM	SLKL-B180VL	SLKL-B180VM	SLKL-B240CL	SLKL-B240CM	SLKL-B240VL
Net Cooling Capacity @AHRI	Btu/hr	170000	170000	170000	170000	240000	240000	240000
EER @AHRI	Btu/W-hr	11.0	11.0	11.0	11.0	10.5	10.5	10.5
Rated Air Flow	CFM	5500	5500	5500	5500	7825	7825	7825
Unit Sizes	L (mm)	3177	3177	3177	3177	3177	3177	3177
	W (mm)	2178	2178	2178	2178	2178	2178	2178
	H (mm)	1448	1448	1448	1448	1448	1448	1448
Weight	kg	756	769	756	769	854	871	854
Refrigerant		R410A						

SLKL-B		SLKL-B240VM	SLKL-B300CL	SLKL-B300CM	SLKL-B300VL	SLKL-B300VM
Net Cooling Capacity @AHRI	Btu/hr	240000	294000	294000	294000	294000
EER @AHRI	Btu/W-hr	10.5	10.0	10.0	10.0	10.0
Rated Air Flow	CFM	7825	9475	9475	9475	9475
Unit Sizes	L (mm)	3177	3862	3862	3862	3862
	W (mm)	2178	2182	2182	2182	2182
	H (mm)	1448	1448	1448	1448	1448
Weight	kg	871	1021	1026	1021	1021
Refrigerant		R410A				

AHRI Condition: 80°F/67°F On-coil, 95°F ambient

Before proceeding with installation, refer to the installation instructions packaged with each model, as well as complying with all Federal, State, Provincial and local codes, regulation and practices.

RHEEM MANUFACTURING MEA FZE

Dubai Airport Freezone (DAFZA), UAE

"In keeping with its policy of continuous progress and product improvement, Rheem reserves the rights to make changes without notice."